

Statement of Performance

December 4, 2008

Product Description

- **Formula:** Spray-Lock[®] Wall Covering Adhesive
- **Material:** Parkland Plastics/NRP
- **Material Acclimatization:** 48 Hours at 72°F or 22°C
- **Substrate Used:** Drywall

General Adhesive Information

- **Adhesive Working Time:** 2 Hours
(after adhesive no longer transfers to fingers when lightly touched).
- **Adhesive Drying Time:** 15-20 Minutes
(or until no adhesive transfers to fingers when lightly touched).
- **Desired Coverage:** 60-70 sq ft
5.5-6.5 m sq

Water-based, 0.0 g/ml VOC content, 22 oz aerosol adhesive. Spray-Lock's[®] allows for easy spray application.

Performance

The test results produced a strong bond with acceptable peel and shear strength. Materials tested are approved for use with our adhesive over acceptable substrates. Spray-Lock[®] does not warrant the dimensional stability of the material regardless of its thickness.

Application Notes


For proper use, follow the instructions supplied with the adhesive or by visiting:
www.spraylock.com

Spray Pattern



- **Desired Spray Pattern**

Image of Material

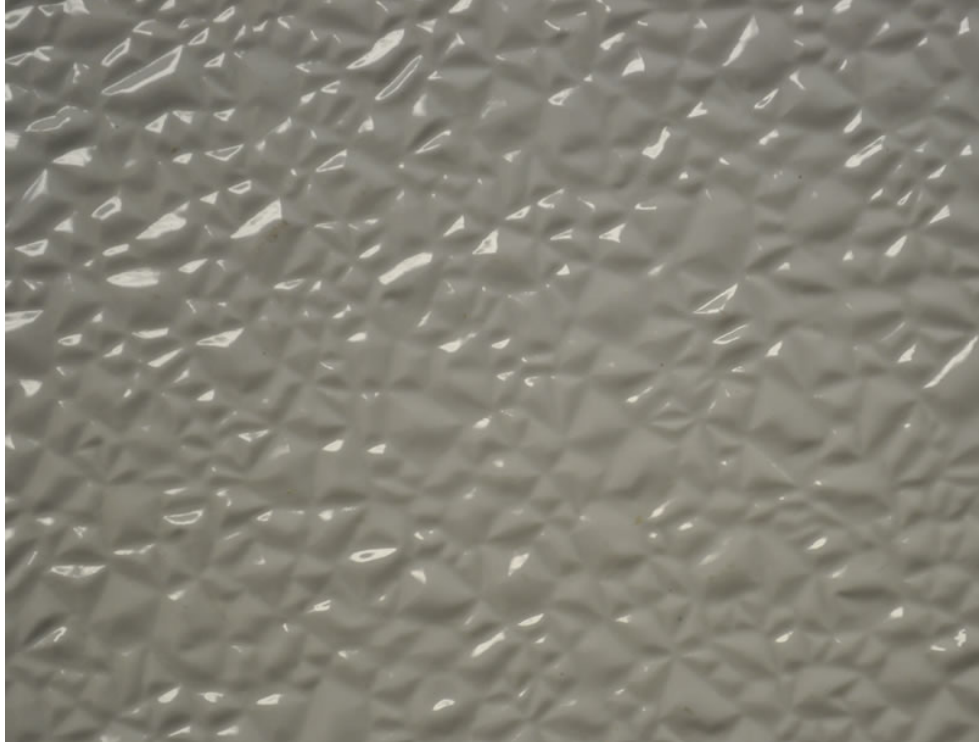

Approved by

A handwritten signature in black ink, appearing to read "M. Land". The signature is fluid and cursive, written over a white background.

Michael Land
Sr. R&D & Tech Services

This report applies to the specific product as supplied to Interlock for testing at the time of the test. Interlock is not responsible for bond performance changes due to conditions beyond our control such as flooring manufacturing changes, flooring composition changes, flooring profile or finish changes, storage, or applicaiton techniques. Internal Quality control methods were followed unless otherwise noted. This document does not represent a guarantee or promise of performance of the products listed. It only describes testing performed under Interlock's conditions. No warranty is implied. This report shall not be reproduced except in full and with permission from Interlock. Interlock retains sole ownership of the data. Spray-Lock® does not warrant the dimensional stability of the flooring material regardless of its thickness. Spray-Lock® should always be used in accordance with Interlock's issued instructions and procedures consistent with Country specific Standars for floor preparations and installation.

Document version A. January 24, 2012

Interlock Industries, Inc. / 5959 Shallowford Rd., Suite 405, Chattanooga, TN 37421 / www.spraylock.com
423-305-6151 Phone / 423-305-6150 Fax